



FABRICANTES DE
MOLINOS DE CAFÉ

MANUFACTURERS
OF COFFEE GRINDERS

Molino de café profesional
para todo tipo de cafés

Professional coffee grinder
for all types of coffee.

TRANQUILO-TRON ABS

COLLECTION ON DEMAND

TECHNICAL CHARACTERISTICS 0-500gr/6' Max 1Kg

VOLTAGE: 230V / 220V / 110V
FREQUENCY: 50Hz / 60Hz
PHASES: 1 (monophasic)
RPM: 1.300 / 1.600
CURRENT: 1,4A / 3A
CAPACITOR: 12nf / 40nf
POWER: 0,12Hp / 275W
PROTECTION RATING: IP21
MOTOR SUPPLIED WITH THERMAL PROTECTOR
MAXIMUM OPERATING TIME: 30min

TEMPERED STEEL GRINDING WHEELS (62HRc) ø 60mm
LIFESPAN OF GRINDING WHEELS: 500 Kg
HOPPER CAPACITY: 1/2Kg (OPTIONAL 1Kg)



MULTI-LANGUAGE TOUCH SCREEN
SELECTION FOR 1 OR 2 FRESHLY GROUND COFFEES OR CONTINUOUS GRINDING
TOTAL OR PARTIAL COFFEE COUNTER
ASSISTANT TIMER GRINDING POINT

DIMENSIONS WIDTH X LENGTH X HEIGHT: 170X340X410mm
WEIGHT: 8Kg
AIR NOISE: 77dB

Diseñado bajo directiva 89/392 CE.



Grinding blades in tempered steel
(62HRc) ø 60mm.

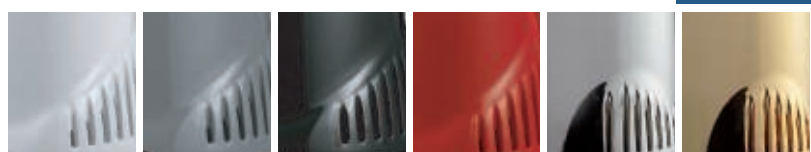

WHITE

GREY

BLACK

RED

CHROME
SILVER

CHROME
GOLD



MAIN ATTRIBUTES

Hopper (1/2kg) made of unbreakable and non-deformable material (co.polyester), with fast lock system and self-levelling when off the coffee grinder, with the possibility of cleaning in a dishwasher at 90 °C. Micrometric regulation of the coffee grind using a regulatory pawl. New expulsion system for the ground coffee (always leaving the grinding cavity clean when the coffee grinder stops). Body made of anti-scratch material, in a single piece (less vibrations, more robustness) with ventilation (internal air inlet and outlet) system. Tray integrated into the bodywork. – Touch screen for easy programming and use (Language selection – Setting the grinding program for each dose – Selection of 1 dose, 2 doses or continuous grinding – Coffee counter: total or partial consumption). Hardened steel grinding blades (62/65HRc) 60mm in diameter.

Optional: Customisation system on the funnel in chrome plate.

